

HAMYEE

# HOW TO APPLY

WALLCOVERING

01



APPLICATION  
INSTRUCTIONS

# SURFACE PREPARATION

## Step 1



- Sand the surface with Sandpaper
- Wallpaper primer.

Also, remember to cure freshly painted walls for at least 3 weeks and only then hang the wallpaper.

# GLUE APPLICATION


## Step 2



- **APPLY GLUE TO THE WALL:** The glue is applied to the wall before installing the wallcovering.
  - **APPLY GLUE TO THE WALLCOVERING:** The glue is applied to the back of the
- Ensure the wall is completely dry before application.

# WALLPAPER APPLICATION


## Step 3

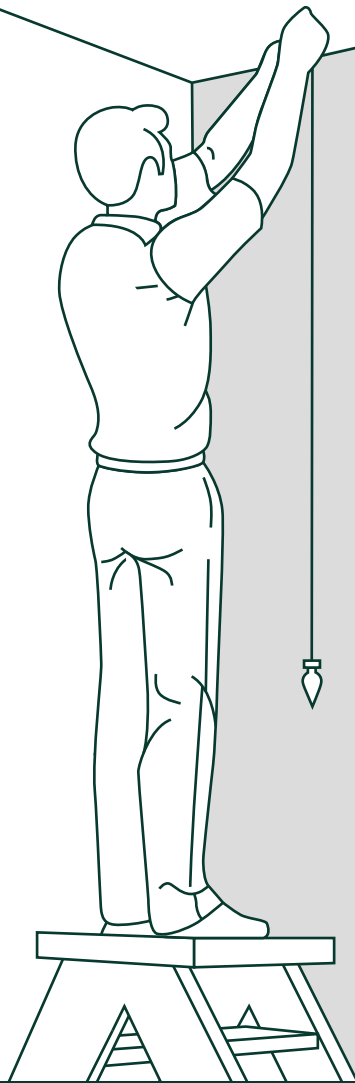

Hang the first strip using a plumb line to get a perfect vertical. Hang the subsequent strips relative to the first strip, matching pattern as required

# SMOOTHENING

## Step 4

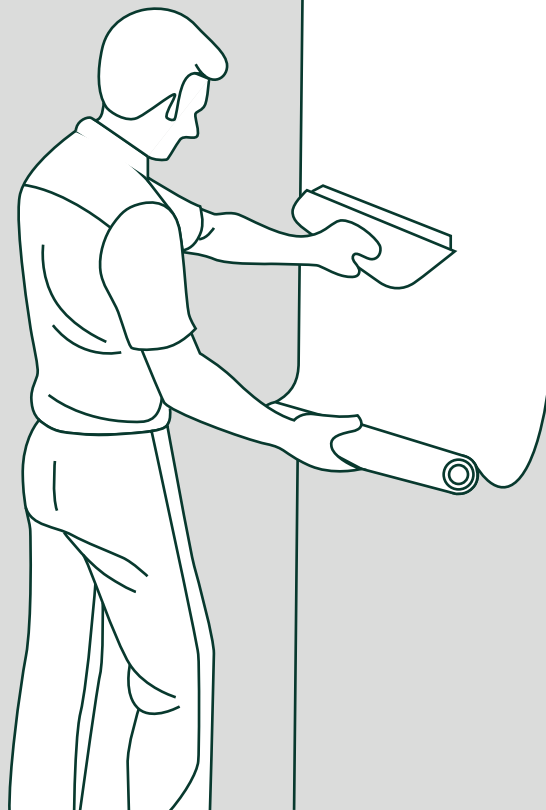

- The length of wallpaper is now smoothed out on the wall with a wallpaper roller.

- Move it from the bottom up and from the middle to the outside edges to let air escape.

Please do this carefully and don't use too much force - you don't want the wallpaper to move or slide.